





Catalog#	BB-0150HPC6RC
Type:	150W High Pressure Sodium
Voltage:	120V

General Information

Lamp Type	150W HPS
ANSI Designation	S55
Line Voltage(V)	120
Regulation	5%
Frequency(Hz)	60
Recommended Fuse(A)	15
Circuit Type	Reactor
Insulation Class	180°C
Capacitor Value	55 UF
Capacitor Voltage Rating	300V
Cap.Temp.Rating	105°C
Winding Materials(Pri/Sec)	Al/Al
Lamp Starter	BI-801
Agency Certification	RU,cRU
Maximum Distance to Lamp	2FT

Wiring Diagram

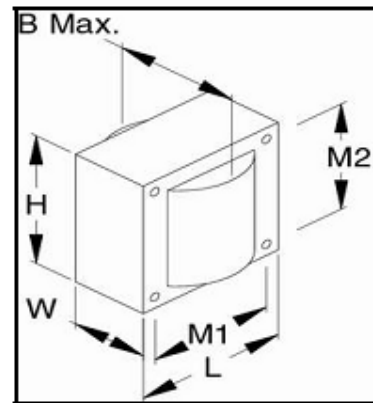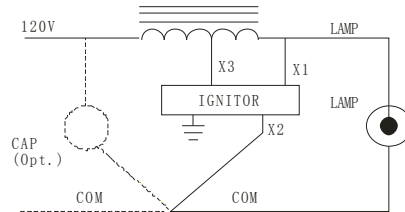

Electrical Characteristics

Line Volt (V)	Power Factor	Line Current (A)			Input Power (W)	Open Circuit Voltage (V)	Min Start Temp.
		Operating	Open	Start			
120	NPF	2.35	NA	4.50	163	120	-40°C

Physical Characteristics

Overall Dimensions (Inches)				Mounting Holes (Inches)			Bracket Dimension (Inches)		Ballast Net Weight (KG)	Lead Length (Inches)
Length	Width	Height	B max.	Diameter	M1	M2	Length	Width		
2.64	2.24	2.25	3.35	0.203	2.19	1.79	-	-	1.357	12-14